


KI-LPR20A90

Smart Titanium Series

IP Camera



2021-Q2

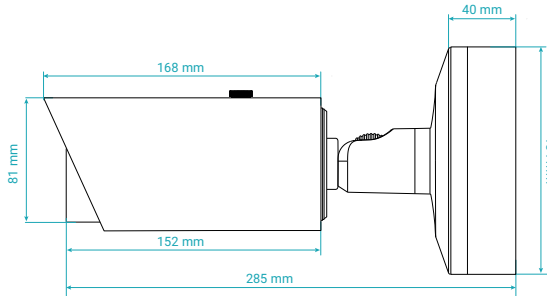

سایر برتری‌ها:

- پشتیبانی از ظرفیت 256GB با ظرفیت SD
- بدنه ضد آب و گرد و غبار با درجه IP67
- پشتیبانی از H.264+ / H.265+
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog

5 years Gold Guarantee

- پنج سال گارانتی طلایی بدون قید و شرط کی دی تی
- شش سال ضمانت پایداری کیفیت تصویر

Camera	
Image Sensor	2MP Starlight (Sony-Japan) Cmos Sensor (1/2.8")
CPU	Dual-Core ARM 2 x A53@1400MHz
Lens	5.3~64mm Motorized 12X Optical Zoom(F-Stop F1.6~F2.8) Fast Auto Focus Lens
Resolution	1920*1080 (2MP)
Available IR Range	100~120M Smart IR SMD (Osram-Germany) Technology
D/N Filter	IR Cut Filter Switch (ICR)
Min Illumination	Color: 0.002 Lux(AGC on) - B/W: 0.0 Lux(IR on)
Angle of View	H-FOV: 61°~5° , V-FOV: 36°~2° , D-FOV: 69°~5°
StarLight View	Yes-Color
Picture Adjust	
Picture Function	140db WDR, DWDR, BLC, HLC, Defog, ROI, 3D DNR
Shutter Speed	Manual (1/3 ~ 1/100.000), Auto
Image Parameter Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Parameter	Saturation, Brightness, Contrast, Sharpness, Hue
Video / Audio	
Video Compression	H.264+(Ultra H.264), H.265+ (Ultra H.265) MJPEG
ROI	Upto 8 Areas
Audio Compression	G.711A,AAC, G-722U, G-726
Frame Rate(60Hz)	90fps@ (1920x1080, 1280x960, 1280x720, 704x576)
Transmission Stream	Double Stream (Code Rate: 256kb-16mb)
Network	
Protocols	IPv4/IPv6, ARP, TCP, UDP, RTCP, RTP, RTSP, RTMP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, Bonjour, SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL
Compatibility	Onvif Ver2.6 , Profile G & Q & T, API
Max Users	10 Users
Streaming Method	Unicast, Multicast
Web Viewer	Internet Explorer
Recording Software	Unlimited KDT CMS/VMS 128CH Per Monitor
Smart Device	IOS, Android Phone & Tablet

Function	
Recording	FTP, NVR, CMS, NAS, SD Card
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	All Intelligent Function
Event Action	Email, PTZ, Snapshot, Recording, Alarm Out, Buzzer, Pop up, Show Message
Intelligent Function	N/A
Interface	
Network	RJ45(10/100Mbps)
Audio	Audio Out, Audio In
Alarm	Alarm Out, Alarm In
CVBS	Yes
Power	PoE LAN, DC In
Control	N/A
Memory Slot	Yes - Micro SD (256Gb Max)
General	
IP Rating	IP67, IK10
Power Supply	DC12V ± 25%
POE Supply	IEEE802.3af - Max 10Watt(IR ON)
Web Language	English, Persian
Dimension	285*134 mm
Weight	1.8 Kg
Operation Humidity	Max Up to 95%RH(Non Condensing)
Operation Temp	-40°C ~ +70°C
Guarantee	
Product Guarantee	5 Years Gold Guarantee
MTBF	100K hrs min- MIL-HDBK-217F (25°)
Certificates	EN, CN, FCC, CFR